

Pre-fit form Lagooni Junior / Junior Special

Dealer	
Consultant	
Delivery address	
Reference no.	
Phone no.	
Email	
Client	



Do you have any questions during the fitting?
Call us at + 31 (0) 174-281551

Please fill in the fitting form as completely as possible. In case of missing data, the responsibility lies with the party who filled in the form.

SW: Seat width SH: Seat height
SD: Seat depth LLL: Lower leg length

• = These components are chosen if a basic configuration is to be made.

Frame

Choose 1 type of frame, use the flowchart model selection tool if the choice of frame type is not clear.

- **Frame Junior:** no moving parts (extra strong).
- **Frame Junior Special:** swing away legrest or short lower leg length.
- If the SD < 43 cm, choose to remove the curved support tube.

* Please enter the required measurements in the "Dimensions" tab.

- **CFRA02** ☐ **Frame Junior** with height and backrest adjustment
- **CFRA09JS** ☐ **Frame Junior Special** with height and backrest adjustment
- AFRA10** ☐ Remove curved support tube
- AFRA11** ☐ Other frame colour
- CFRA04** ☐ Custom frame *

Comments:

Wheels

- With 24" wheels, the range of seat height is: 55 - 62 cm (with a seat cushion of 8 cm thick). The seat height is measured from the ground to the top of the seat.
- Take the seat height into account if the shower/toilet wheelchair is to be driven over a toilet bowl.

- CWIE20-75** ☐ 20" XCore rear wheels and 75 mm front wheels
- **CWIE24-100** ☐ 24" XCore rear wheels and 100 mm front wheels
- CWIE26-125** ☐ 26" Plastic wheels and 125 mm front wheels
- AWIE10** ☐ Removal push rims
- CWIE02A** ☐ Rubber slipcover for push rims 20"
- CWIE02B** ☐ Rubber slipcover for push rims 24"
- CWIE02C** ☐ Rubber slipcover for push rims 26"
- AWIE11** ☐ Mount push rims against wheel (not possible for 26")
- CWIE12** ☐ Push rims with tetranops, set
- CWIE12L** ☐ Push rims with tetranops, left
- CWIE12R** ☐ Push rims with tetranops, right

Comments:

Brakes

- CREM01SET ☐ Knee lever brake
- CREM02SET ☐ Extended brakes
- CREM06SET ☐ Scissor brakes

Comments:

Seat


- Width: 40 / 42 / 44 / 46 cm
- Standard seat thickness: 8 cm (minimum of 6 cm).
- For a SD < 43 cm, choose to remove the curved support tube (frame section).
- Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.
- Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.

* Please enter the required measurements in the "Dimensions" tab.


- CZIT01 ☐ Seat upholstered with polyether and neopreen or platilon *
 - ☐ Neoprene: black
 - ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CZIT07 ☐ Filler piece
- CZIT08 ☐ Abduction bobbin *
- AZIT01E ☐ Extra seat adjustments *

Example


Opening front/back
Shape: taperd




Opening front/back
Shape: keyhole




Opening front/back
Shape: straight slot




Opening middle/deviating
Shape: oval



Opening left/right
Shape: oval



Opening front/back
Shape: ellipse



Inch	cm
1	2,54

Please state the **dimensions (cm)** of the recess below.
There is a surcharge for a recess on the left or right side. If the place/shape (for example wedge in the seat) differs from the examples above, please enclose a drawing including dimensions.

Fields marked with * are REQUIRED.	
* A:	
* B:	
* C:	
* D:	
* E:	
F:	
* Location opening:	
* Shape opening:	

(<7 cm not possible)

Comments:

Backrest bracket

- The width of the backrest bracket is as wide as the width of the seat.
- The standard height of a backrest bracket is 48 cm.

- **CRUG01** ☐ Backrest bracket
- CRUG01-M** ☐ Backrest bracket custom made *

Comments:

Backrest

- The standard height of a backrest canvas is 30 cm.
- If an upholstered backrest is chosen, the following applies: seat depth + 3 cm.
- For a 'standard' upholstered backrest the following applies: width of the upholstered back = backrest bracket + 2 cm.
- Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.
- Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.
- * Please enter the required measurements in the "Dimensions" tab.

- **CRUG12** ☐ Backrest canvas, black
- CRUG01B** ☐ Backrest upholstered with polyether and **neoprene or platilon** *
 - ☐ Neoprene: black
 - ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CRUG01BZU** ☐ Backrest upholstered with side support with polyether and **neoprene or platilon** *
 - ☐ Neoprene: black
 - ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CRUG01K** ☐ Backrest upholstered contour with polyether and **neoprene or platilon** *
 - ☐ Neoprene: black
 - ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue

Comments:

Armrest

▫ The armrests are swing-away and removable.

▫ The height of the armrest is measured from top edge of seat to top edge of armrest.

▫ For shorter and lower armrests, you can choose a junior armrest (see size sheet tab) or a custom-made armrest.

** Please enter the required measurements in the "Dimensions" tab.*

- **CARM03-15** ☐ Junior armrest straight H15 cm
- **CARM03-18** ☐ Junior armrest straight H18 cm
- CARM01** ☐ Armrest single bend H23 cm
- CARM02** ☐ Armrest extra strong H23 cm
- CARM04** ☐ Armrest custom-made *
- CARM09** ☐ Armrest with extra horizontal bend
- AARM02E** ☐ Additional work armrests (lower) *
- ☐ No armrests

Comments:

Armpad

▫ Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.

▫ Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.

** Please enter the required measurements in the "Dimensions" tab.*

- **CARM05** ☐ Armpads PU
- CARM06** ☐ Armpads upholstered
 - ☐ Neoprene: black
 - ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- AARM06E** ☐ Extra labour upholstered armpads *
- ☐ No armpads

Comments:

Legrest and footplates

◦ If lower leg length (LLL) < 40 cm, please choose a Life Special frame.

◦ Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.

◦ Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.


* Please enter the required measurements in the "Dimensions" tab.

Lagooni Junior

- CVOE01** ☐ Flip-up footrests
- **CVOE04** ☐ One-piece footrest, upholstered
- ☐ Neoprene: black
- ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- ☐ No footplate

Lagooni Junior Special

- **CBE01SET** ☐ Swing-away legrest with flip-up footplate
- CBE02SET** ☐ Elevating legrest with flip-up footplate
- CBE04SET** ☐ Elevating legrest, upper part (for amputation)
- CVOE03** ☐ One-piece footrest, upholstered (mounting footrest with clamps)
- ☐ Neopreen: zwart
- ☐ Platilon: zwart / mat grijs / ferrari rood / helder blauw / marine blauw
- CVOE10** ☐ One-piece Junior footrest, foldable to the back (max. LLL = 35 cm)
- When height adjusted to the lowest position.
- LVOE05** ☐ Upholstery one-piece footplate
- In combination with swing-away legrest
- ☐ Mounting on footplate, foldable to the right
- ☐ Mounting on footplate, foldable to the left
- ☐ Neoprene: black
- ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CVOE09** ☐ Upholstery two-piece footplate
- ☐ Neoprene: black
- ☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- AVOE01E** ☐ Extra adjustments upholstered footplate *
- ☐ No legrest or footplates



Toilet bowl height - A (cm):

Bottom of seat - B (cm):

Lower leg length - C (cm):

Comments:

Anti-Tip

◦ In combination with a passive/ceiling lift, an anti-tip system is recommended.

- CATI01** ☐ Anti-tip with foot pedal

Comments:

Headrest

▫ If a headrest is needed, it is recommended to choose a upholstered backrest.

▫ Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.

▫ Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.

- CSTE02** ☐ Headrest upholstered
☐ Neoprene: black
☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CSTE03K** ☐ Headrest PU **Small**
- CSTE03MG** ☐ Headrest PU **Medium**

Comments:

Lateral support

▫ Length of pelvic belt: from rotary knob back angle adjustment left to rotary knob back angle adjustment right.

▫ Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.

▫ Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.

** Please enter the required measurements in the "Dimensions" tab.*

- CSTE01L** ☐ Lateral support upholstered with mounting kit, left *****
☐ Neoprene: black
☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CSTE01R** ☐ Lateral support upholstered with mounting kit, right *****
☐ Neoprene: black
☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CGOR02** ☐ Pelvic belt

Length pelvic belt (cm):

Comments:

Leg protection

▫ Properties neoprene: soft, stiffer than platilon, suitable in combination with decubitus wounds.

▫ Properties platilon: strong, smoother than neoprene, suitable in combination with transfer board.

- CKUI01** ☐ Adjustable calf strap **neopreen**
- CKUI02** ☐ Calf protector for frame tube, upholstered
☐ Neoprene: black
☐ Platilon: black / matt grey / ferrari red / bright blue / navy blue
- CKUI03** ☐ Adjustable calf strap **bisonyl**

Comments:

Insertion rails stainless steel

° The rails protrude 3 cm below the seat. Take this into account when determining the seat height.

CTOO03 ☐ Insertion rails for bedpan / toiletbucket Ø 30 cm

Comments:

Bedpan / toilet bucket

° When rinsing the intestines, it is advised to choose a toilet bucket because of the size of the bucket.

CTOO02 ☐ Bedpan with lid, stainless steel

CTOO04 ☐ Toilet bucket with lid, stainless steel

Comments:

Accessories

* Please enter the required measurements in the "Dimensions" tab.

CTOO01SP ☐ Splash skirt (bisonyl) *


CTAF01 ☐ Tabletop transparent with accessories *

CBED01 ☐ Bedhook and receiver

Comments:

BACKREST

Upholstered backrest

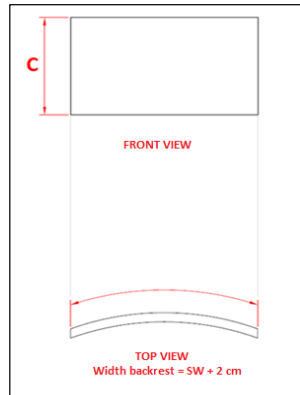

Upholstered backrest	
C:	


(Minimum 15 cm, maximum 40 cm)

Note:

- With a padded backrest, the effective seat depth is reduced by 3 cm.

- A padded backrest is 2 cm wider than the backrest bracket and therefore also the seat width. Take this into account when completing the tables below.

Upholstered backrest with lateral support

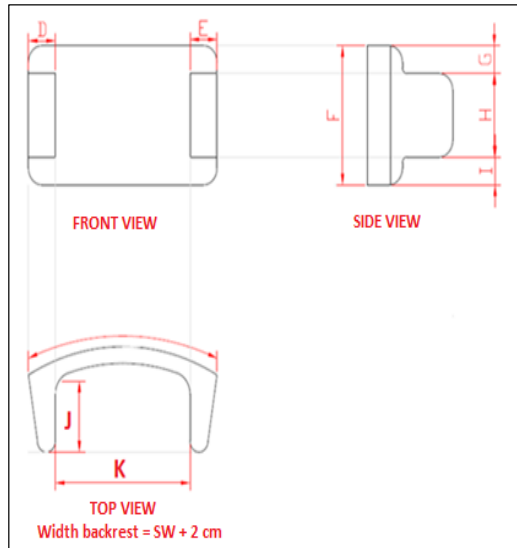

Upholstered backrest with lateral support	
D _{right} :	
E _{left} :	
F:	
G _{right} :	
G _{left} :	
H _{right} :	
H _{left} :	
I _{right} :	
I _{left} :	
J _{right} :	
J _{left} :	
K:	


ARMREST

Type armrest

Armrest type: extra strong, single bend & horizontal bend


Extra strong

Height AH: customised



Single bend

Height AH: customised




Horizontal bend

Example left armrest with horizontal bend in front.

Height AH: customised


Length AL: customised

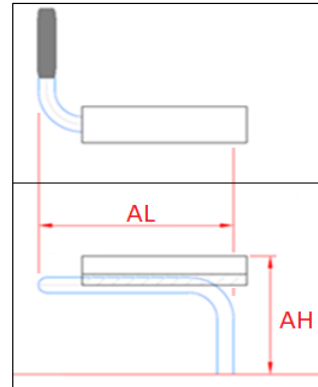

Extra strong

Length AL: customised

Standard AL extra strong: 32 cm




Single bend

Length AL: customised

Standard AL single bend: 32 cm

Standard AL Junior: 24 cm



AH - Height custom armrest (cm)

Extra strong:	
Single bend:	
Horizontal bend:	


AL - Length custom armrest (cm)

Extra strong:	
Single bend:	
Horizontal bend:	

Type armpad

Armpad type: PU & upholstered.

PU armpad




Length: 25 cm (standard)


Note:

The PU armrests are available in a standard size of 25 cm. If a different size is required, choose a padded armrest. The armrests are adaptable for the extra strong armrests as well as the armrests with single bend and the armrests with horizontal bend. Enter the required dimensions in the table at the end of this document.


Upholstered armpad




Length: 25 cm




Length: 30 cm
5cm extended backwards




Length: 35 cm
10 cm extended backwards




Length: customized



Junior model
Length: 20 cm



Junior model
Length: 25 cm
5 cm extended backwards




Junior model
Length: 30 cm
10 cm extended backwards

Note:

Junior armrests are **lower** and **shorter** than the extra strong armrests & armrests with single bend. Please take this into account when choosing the armrest length.


Upholstered armrest width (C_1) is 6 cm wide as standard.

Example: Front armrest bend: left (Junior model)

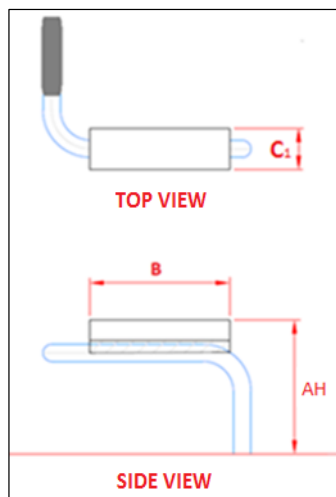

Armrest horizontal bend


Height (AH): 15/18/23/... cm
Length armpad (B): 20 cm
Width armpad (C_1): 6 cm

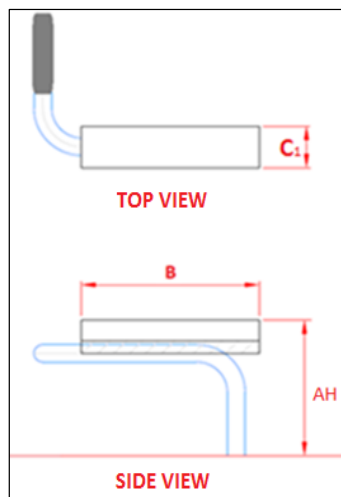


Armrest horizontal bend

Height (AH): 15/18/23/... cm
Length armpad (B): 25 cm
Width armpad (C_1): 6 cm

Upholstered armrest width (C_1) is 6 cm wide as standard.



FRONT VIEW



FRONT VIEW

Measurements hemiplegic armrest

Measurements armrest & armpad (cm)	
AH:	Standard 15/18
B:	
C_1 :	
C_2 :	
D_1	
D_2	
E:	
Extend to:	

(C_1 & C_2 : minimum 6 cm, maximum 12 cm)

(D_1 : minimum 4 cm, maximum 10 cm)

($D_2 = E + \text{minimum 4 cm}$)

ACCESSORIES

Splash skirt

A Splash skirt is made of bisonyl. It is mounted under the seat. Fill in the width and height of the splash skirt below.

Measurements in cm

Height	
Width	

Table top

A table top is fitted under the armrest using a receiving tube and fastened with a star knob. Indicate below which side the table top should fold away. Then also indicate the dimensions of the table top and the stomach recess.

- ☐ Swing away to the left
☐ Swing away to the right

Measurements in cm

Total width		
Total depth		
Belly recess		

The minimum total width of the table top is seat width + 10 cm.

The maximum depth of the table top is 60 cm.

Belly recess: measure from the back of the tabletop to the front of the Belly.